

EURAX F 535

Transducer for Measuring Frequency Difference

EURAX plug-in module in Euro format



Application

The transducer **EURAX F 535** (Fig. 1) converts the frequency difference of two synchronised supplies into a **load independent** DC current or a **load independent** DC voltage proportional to the measured value.

The transducer fulfils all the important requirements and regulations concerning electromagnetic compatibility **EMC** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standards** ISO 9001.



Fig. 1. EURAX F 535 as plug-in module for 19" rack-mounted case, front plate width 7 TE.

Features / Benefits

- **Measuring inputs:** Sine, rectangular or distorted wave forms of nominal input voltages with dominant fundamental waves

Measured variables	Nominal input voltages	Measuring range limits
Frequency difference	10 to 690 V	$\Delta = \pm 1\% f_s$ to $\pm 80\% f_s$ f_s and $f_g \geq 10$ Hz to ≤ 1.5 kHz

- **Measuring output:** Unipolar, bipolar or live zero output variables
- **Measuring principle:** Digital period measurement
- **Wide DC, AC power pack tolerance / Universal**
- **Plug-in module (front plate width 7 TE) for 19" rack-mounted case / Ease of mounting in rack system**

Own consumption: $< U_N \cdot 1.5$ mA per measuring input

Overload capacity:

Measured quantities	Number of applications	Duration of one application	Interval between two successive applications
U_N	—	continuously	—
$1.2 \times U_N^1$	—	—	—
$2 \times U_N^1$	10	1 s	10 s

¹ But max. 264 V with power supply from voltage measuring input

Wave form: Any; fundamental wave only taken into account

Technical data

General

Measured quantity: Frequency difference Δf
 Measuring principle: Digital period measurement

Measuring inputs \rightarrow

Measuring range
 $(f_s =$ bus bar
 $f_g =$ generator): See section "Specification and ordering information"

Nominal input voltages U_N :
 Generator and bus bar
 10 ... 230 V or 230 ... 690 V
 (max. 230 V with power supply from voltage measuring input)

Measuring output \rightarrow

Load-independent DC current:
 0 ... 1 to 0 ... 20 mA
 resp. live-zero
 0.2 ... 1 to 4 ... 20 mA
 ± 1 to ± 20 mA

Burden voltage:
 + 15 V, resp. - 12 V

Load-independent DC voltage:
 0 ... 1 to 0 ... 10 V
 resp. live-zero
 0.2 ... 1 to 2 ... 10 V
 ± 1 to ± 10 V

Load capacity: Max. 4 mA

EURAX F 535

Transducer for Measuring Frequency Difference

Voltage limit under $R_{ext} = \infty$: ≤ 25 V

Current limit under overload: Approx. $1.3 \times I_{AN}$ at current output
Approx. 30 mA at voltage output

Residual ripple in output current: $< 0.5\%$ p.p.

Nominal value of response time: 4 periods of the measuring frequency

Other ranges: 2, 8 or 16 periods of the measuring frequency


Behaviour of output current in different operating state:

Operating state ¹		Output	Display
Generator frequency	Bus frequency		
$f_G > f_S$		unipolar	$> I_{AN} / 2$
		bipolar	positive
missing ²	Nominal value	unipolar	approx. 0
		bipolar	approx. $-110\% I_{AN}$
Nominal value	missing ²	unipolar	approx. $+110\% I_{AN}$
		bipolar	
missing ²	missing ²	unipolar	approx. $I_{AN} / 2$
		bipolar	approx. 0

¹ With power supply switched on

² e.g. switched off or fault condition

Output characteristic

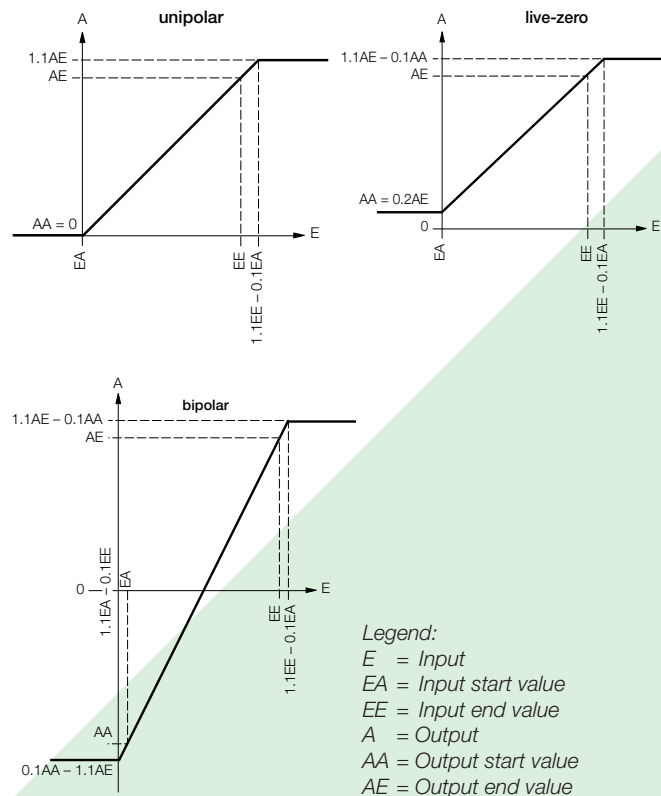

Accuracy (acc. to EN 60 688)

Reference value: Output span

Basic accuracy: Class 0.2

Reference conditions

Ambient temperature: 15 ... 30 °C

Input voltage: U_{min} to U_{max}

Distortion factor: No influence

Power supply: At nominal range

Output burden: ΔR_{ext} max.

Safety

Protection class: II (protection isolated, EN 61 010)

Pollution degree: 2

Installation category: III

Rated insulation voltage (against earth): 230 resp. 400 V, input
230 V, power supply
40 V, output

Test voltage: 50 Hz, 1 min. acc. to EN 61 010-1
3700 resp. 5550 V, input versus all other circuits
3700 V, power supply versus output

Power supply $\rightarrow \bigcirc$

AC, DC power pack (DC or 40 ... 400 Hz)

Table 1: Rated voltages and permissible variations

Rated voltage	Tolerance
85 ... 230 V DC, AC	DC - 15 ... + 33%
24 ... 60 V DC, AC	AC $\pm 15\%$

or

power supply from voltage measuring input: 24 ... 60 V AC or 85 ... 230 V AC,
Note: $40 \text{ Hz} \leq f \leq 400 \text{ Hz}$

Power consumption: Approx. 2 W resp. 4 VA

Installation data

Mechanical design: Plug-in module for 19" rack-mounted case, Euro format 100 x 160 mm

Space requirements: 7 TE (35.26 mm)
(see section "Dimensional drawing")

Front plate colour: Grey RAL 7032

Designation: EURAX F 535

Mounting position: Any

Electrical connections: 32-pole plug acc. to DIN 41 612, pattern F

Contact fitting see section "Electrical connections"

EURAX F 535

Transducer for Measuring Frequency Difference

Coding:	By coding pins, removed / not removed, see section "Electrical connections"	Ambient tests	
		EN 60 068-2-6:	Vibration
Weight:	Approx. 0.21 kg	Acceleration:	± 2 g
		Frequency range:	10 ... 150 ... 10 Hz, rate of frequency sweep: 1 octave/minute
Environmental conditions		Number of cycles:	10, in each of the three axes
Operating temperature:	- 10 to + 55 °C	EN 60 068-2-27:	Shock
Storage temperature:	- 40 to + 70 °C	Acceleration:	3 x 50 g 3 shocks each in 6 directions
Relative humidity of annual mean:	≤ 75%	EN 60 068-2-1/-2/-3:	Cold, dry heat, damp heat
Altitude:	2000 m max.		
Indoor use statement!			

Table 2: Specification and ordering information

Description	*Blocking code	no-go with blocking code	Article No./ Feature
EURAX F 535 Order code 535 - xxxx xxx			535 –
Features, Selection			
1. Mechanical design Plug-in module for 19" rack-mounted case			2
2. Nominal input voltage Generator and bus bar: U_N : 10 ... 230 V			1
U_N : > 230 ... 690 V Not possible with power supply from measuring input	A		2
3 phase system: Input voltage = phase to phase voltage			
3. Measuring range Frequency: Bus bar = f_s / Generator = f_G			
$f_s = 50$ Hz / $f_G = 49.5 ... 50 ... 50.5$ Hz			1
$f_s = 50$ Hz / $f_G = 47.5 ... 50 ... 52.5$ Hz			2
$f_s = 50$ Hz / $f_G = 45 ... 50 ... 55$ Hz			3
$f_s = 50$ Hz / $f_G = 40 ... 50 ... 60$ Hz			4
$f_s = 60$ Hz / $f_G = 57.5 ... 60 ... 62.5$ Hz			5
Non-standard limit value $\Delta f \pm 1\% f_s$ to $\pm 80\% f_s$ [Hz] f_s and $f_G \geq 10$ Hz to $\leq 1,5$ kHz With power supply from measuring input min. 40 Hz, max. 400 Hz see feature 5, lines 3 and 4			9
4. Output signal			
0 ... 20 mA			1
4 ... 20 mA			2
Non-standard 0 ... 1.00 to 0 ... < 20, - 1.00 ... 0 ... 1.00 to - 20 ... 0 ... 20 (symmetrical) [mA]			9
0.2 ... 1 to < (4 ... 20) (AA/AE = 1/5)			
0 ... 10 V			A
Non-standard 0 ... 1.00 to 0 ... < 10, - 1.00 ... 0 ... 1.00 to - 10 ... 0 ... 10 (symmetrical) [V]			Z
0.2 ... 1 to 2 ... 10 (AA/AE = 1/5)			
AA = Output start value, AE = Output end value			

EURAX F 535

Transducer for Measuring Frequency Difference

Description	*Blocking code	no-go with blocking code	Article No./ Feature
EURAX F 535	Order code 535 - xxxx xxx		535 -
Features, Selection			
5. Power supply			
85 ... 230 V DC, AC			1
24 ... 60 V DC, AC			2
Internal from measuring input (24 ... 60 V AC)		A	3
Internal from measuring input (85 ... 230 V AC)		A	4
6. Response time			
4 periods of the input frequency (standard)			1
2 periods of the input frequency			2
8 periods of the input frequency			3
16 periods of the input frequency			4
7. Test certificate			
Without test certificate			0
Test certificate in German			D
Test certificate in English			E

* Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "Blocking code".

Electrical connections

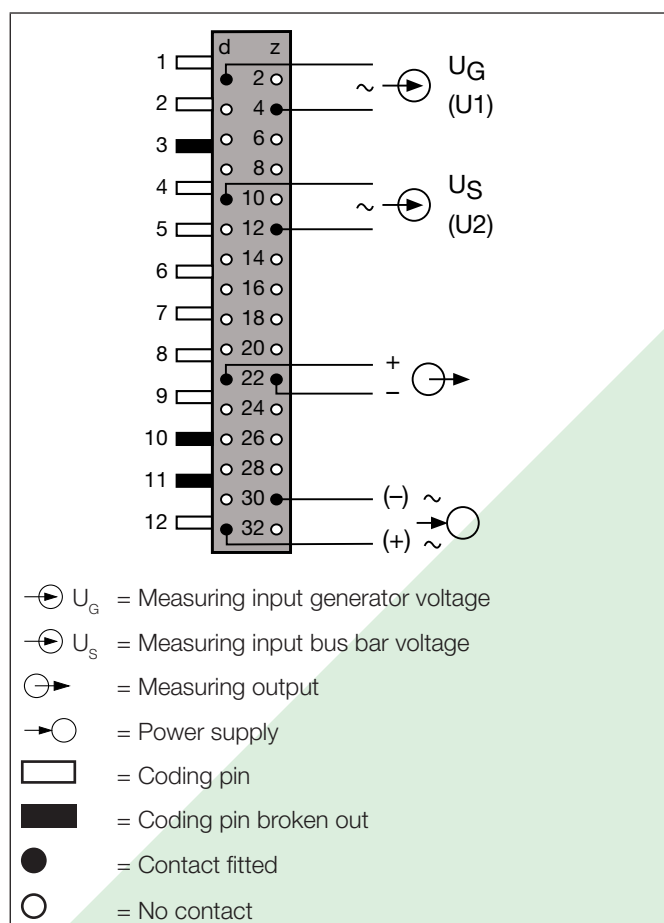


Fig. 2. EURAX F 535, view of the rear of plug-in module.

Dimensional drawing

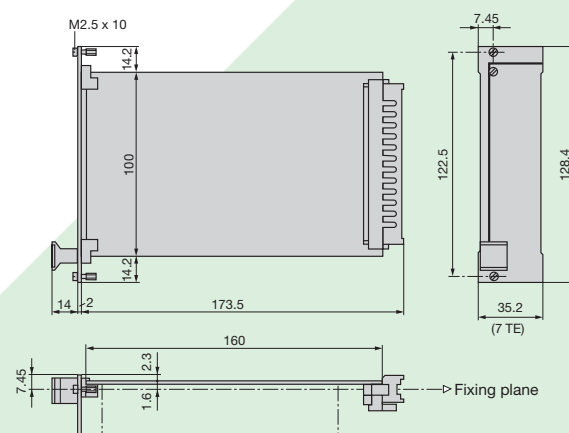


Fig. 3. EURAX F 535, front plate width 7 TE.

CAMILLE BAUER

Rely on us.

Camille Bauer Ltd
 Aargauerstrasse 7
 CH-5610 Wohlen / Switzerland
 Phone: +41 56 618 21 11
 Fax: +41 56 618 35 35
 e-Mail: info@camillebauer.com
 www.camillebauer.com