

# Analog-Digital Multimeter

3-349-237-03  
3/1.07

- Resolution: 10  $\mu$ V, 10 m $\Omega$ , 1  $\mu$ A
- Precision temperature measurement
- Automatic and manual measuring range selection
- Measured value memory, data hold, min-max value
- Overload and blown fuse indicators
- IP 40 protection
- Protective rubber cover
- 3 year guarantee
- Infrared interface enables multiple measuring system and PC analysis
- DKD calibration certificate included as a standard feature



## Features

### Automatic Blocking Sockets (ABS) \*

Automatic blocking sockets prevent incorrect connection of measurement cables and inadvertent selection of the wrong measured quantity. This significantly reduces danger to the user, the instrument and the system under test, and eliminates it entirely in many cases.

### Automatic / Manual Measuring Range Selection

Measured quantities are selected with the rotary switch. The measuring range is automatically matched to measured values. The measuring range can be selected manually as well with the help of the AUTO/MAN key.

### Display of Negative Values at the Analog Scale

Negative values are also displayed at the analog scale for zero-frequency quantities, allowing for observation of measured quantity fluctuation around the zero-point.

### Storage of min-max values

In addition to displaying the current measured value, the minimum or maximum value can be continuously refreshed and saved.

### Automatic Storage of Measured Values \*

The data hold function allows for storage of the digitally displayed measured value. A patented process assures that random values are not saved to memory in the case of rapidly changing measured quantities, but rather the actual measured value. The stored measured value appears at the digital display. The analog display continues to read out the current measured value.

### Continuity Test

Allows for the detection of short-circuits and interrupted conductors. In addition to displaying test results, an acoustic signal can also be generated if desired.

### Power Saving Circuit

The device is switched off automatically if the measured value remains unchanged for a period of approximately 10 minutes, and if none of the controls are activated during this time. Automatic shutdown can be deactivated.

### Protective Cover for Harsh Conditions

The instrument is protected against damage in the event of impacts or dropping by means of a soft rubber cover with tilt stand. The rubber material also assures that the instrument does not wander if it is set up on a vibrating surface.

### Interface and METRAWin<sup>®</sup> 10/METRAHit<sup>®</sup> Software (optional)

The multimeter is equipped with a serial IR interface, by means of which measured values, control settings and device type can be transmitted to a PC using a data frame. These values are transmitted in an electrically isolated fashion through the housing to a plug-in interface using infrared light.

\* Patented

# Analog-Digital Multimeter

## Applicable Regulations and Standards

IEC 61 010-1/EN 61010-1/ VDE 0411-1	Safety requirements for electrical equipment for measurement, control and laboratory use
EN 60529 VDE 0470, Part 1	Test instruments and test procedures Protection provided by enclosures (IP code)
IEC 61 326/EN 61 326	Electromagnetic compatibility (EMC)

## Voluntary Manufacturer's Guarantee

36 months for material and workmanship  
1 ... 3 years for calibration (depending on application)

## Characteristic Values

Measuring Function	Measuring Range	Resolution 3000	Input Impedance		Intrinsic Error at Max. Resolution under Reference Conditions		Overload Capacity <sup>1)</sup>		Measuring Function
			≡	~	±(... % rdg. + ... d)	±(... % rdg. + ... d)	Value	Time	
<b>V</b>	30 mV	10 μV	>10 GΩ // < 40 pF	10 MΩ // < 40 pF	0.5 + 3	—	600 V DC AC eff sine	Cont.	<b>V</b>
	300 mV	100 μV	>10 GΩ // < 40 pF	10 MΩ // < 40 pF	0.5 + 3	—			
	3 V	1 mV	11 MΩ // < 40 pF	11 MΩ // < 40 pF	0.5 + 3	1 + 3			
	30 V	10 mV	10 MΩ // < 40 pF	10 MΩ // < 40 pF	0.5 + 3				
	300 V	100 mV	10 MΩ // < 40 pF	10 MΩ // < 40 pF	0.5 + 3				
600 V	1 V	10 MΩ // < 40 pF	10 MΩ // < 40 pF	0.5 + 3	0.5 + 3				
			Voltage drop at approx. range limit		≡	~			
<b>A</b>	300 μA	100 nA	15 mV	—	1.0 + 5 (> 10 d)	—	0.36 A	Cont.	<b>A</b>
	3 mA	1 μA	150 mV	150 mV	1.0 + 2	1.5 + 2 (> 10 d)			
	30 mA	10 μA	650 mV	—	1.0 + 5 (> 10 d)	—			
	300 mA	100 μA	1 V	1 V	1.0 + 2	1.5 + 2 (> 10 d)	10 A <sup>4)</sup>		
	3 A	1 mA	100 mV	—	1.0 + 5 (> 10 d)	—			
10 A	10 mA	270 mV	270 mV	1.0 + 2	1.5 + 2 (> 10 d)				
			Open-circuit voltage	Measuring current at range limit	±(... % rdg. + ... d)				
<b>Ω</b>	30 Ω	10 mΩ	max. 3.2 V	max. 250 μA	0.7 + 3 <sup>2)</sup>	—	600 V DC AC eff sine	max. 10 s	<b>Ω</b>
	300 Ω	100 mΩ	max. 3.2 V	max. 250 μA	0.7 + 3	—			
	3 kΩ	1 Ω	max. 1.25 V	max. 45 μA	0.7 + 3	—			
	30 kΩ	10 Ω	max. 1.25 V	max. 4.5 μA	0.7 + 3	—			
	300 kΩ	100 Ω	max. 1.25 V	max. 1.5 μA	0.7 + 3	—			
	3 MΩ	1 kΩ	max. 1.25 V	max. 150 nA	0.7 + 3	—			
30 MΩ	10 kΩ	max. 1.25 V	max. 15 nA	2.0 + 3	—				
<b>→</b>	2 V	1 mV	max. 3.2 V	—	0.5 + 3	—		<b>→</b>	
<b>°C</b>	Pt100	-200.0 ... +200.0 °C	0.1 °C	—	—	2 K + 5 d <sup>3)</sup>	600 V DC / AC eff sine	max. 10 s	<b>°C</b>
		+200.0 ... +850.0 °C		—	—	1.0 + 5 <sup>3)</sup>			
	Pt1000	-100.0 ... +200.0 °C		—	—	2 K + 2 d <sup>3)</sup>			
		+200.0 ... +850.0 °C		—	—	1.0 + 2 <sup>3)</sup>			

1) At 0 to + 40 °C

2) With zero balancing, or + 35 digits without zero balancing

3) Without sensor

4) 12 A for 5 min, 16 A for 30 s

### Key

rdg. = reading (measured value)


d = digit

# Analog-Digital Multimeter

## Influencing Quantities and Influence Error


Influencing Quantity	Sphere of Influence	Measured Quantity / Measuring Range	Influence Error <sup>1)</sup> ±(... % rdg. + ... digits)
Temperature	0 °C ... +21 °C and +25 °C ... +40 °C	30/300 mV $\overline{=}$	1.0 + 3
		3 ... 300 V $\overline{=}$	0.15 + 1
		600 V $\overline{=}$	0.2 + 1
		V $\sim$	0.4 + 2
		300 $\mu$ A ... 300 mA $\overline{=}$	0.5 + 1
		3 A/10 A $\overline{=}$	0.5 + 1
		A $\sim$	0.75 + 1
		30 $\Omega$ <sup>2)</sup>	0.15 + 2
		300 $\Omega$	0.25 + 2
		3 k $\Omega$ ... 3 M $\Omega$	0.15 + 1
		30 M $\Omega$	1.0 + 1
		-200 ... +200 °C	0.5 K + 2
		+200 ... +850 °C	0.5 + 2
Measured Quantity Frequency	> 65 Hz ... 400 Hz	3 ... 600 V $\sim$	2.0 + 3
	> 400 Hz ... 1 kHz		2.0 + 3
	> 65 Hz ... 1 kHz		A $\sim$

Measuring Voltage for Resistance Measurement

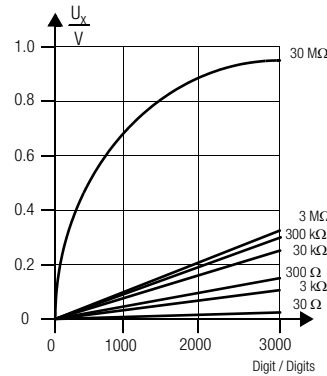

Voltage  $U_x$  at resistance  $R_x$  to be measured relative to the measuring range and the display

Measuring Current for Diode and Continuity Testing

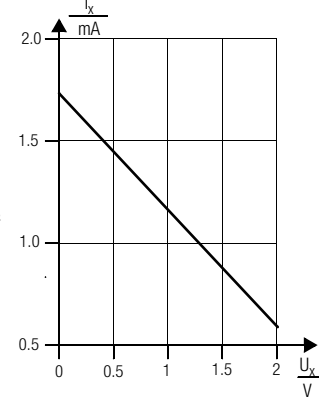

Measuring current  $I_x$  relative to displayed voltage value  $U_x$  at the device under test

Influencing Quantity	Sphere of Influence	Measured Quantity / Measuring Range	Influence Error
Battery Voltage	$\overline{+}$ <sup>3)</sup> ... < 7.9 V > 8.1 V ... 10.0 V	V $\overline{=}$	± 2 digits
		V $\sim$	± 4 digits
		A $\overline{=}$	± 4 digits
		A $\sim$	± 6 digits
		30 $\Omega$ / 300 $\Omega$ / °C	± 4 digits
		3 k $\Omega$ ... 30 M $\Omega$	± 3 digits
Relative Humidity	75%	V $\overline{=}$	1 x intrinsic error
	3 days instrument off	A $\overline{=}$ $\Omega$ °C	
DATA	—		± 1 digit
MIN / MAX	—	V $\overline{=}$ , A $\overline{=}$	± 2 digits

<sup>1)</sup> For temperature: specified error valid starting with temperature changes as of 10 K.  
<sup>2)</sup> For frequency: specified error valid starting with display values as of 300 digits.  
<sup>3)</sup> After the  $\overline{+}$  symbol appears at the display

Influencing Quantity	Sphere of Influence	Measuring Ranges	Damping
Common Mode Interference Voltage	Interference quantity max. 600 V $\sim$ 50 Hz, 60 Hz sine	V $\overline{=}$	> 120 dB
		3 V $\sim$ , 30 V $\sim$	> 80 dB
		300 V $\sim$	> 70 dB
		600 V $\sim$	> 60 dB
Series Mode Interference Voltage	Interference quantity: V $\sim$ , respective nominal value of the measuring range, max. 600 V $\sim$ , 50 Hz, 60 Hz sine	V $\overline{=}$	> 50 dB
		V $\sim$	> 110 dB

## Response Time (after manual range selection)

Measured Quantity / Measuring Range	Response Time		Measured Quantity Step Function
	Analog Display	Digital Display	
V $\overline{=}$ , V $\sim$ , A $\overline{=}$ , A $\sim$	0.7 s	1.5 s	from 0 to 80% of the upper range limit
30 $\Omega$ ... 3 M $\Omega$	1.5 s	2 s	from $\infty$ to 50% of the upper range limit
30 M $\Omega$	4 s	5 s	
$\overline{+}$	0.7 s	1.5 s	
°C		max. 1 ... 3 s	from 0 to 50% of the upper range limit

## Reference Conditions

Ambient temperature + 23 °C ± 2 K  
 Relative humidity 40 ... 60%  
 Measured quantity frequency 45 ... 65 Hz  
 Measured quantity waveshape Sinusoidal  
 Battery voltage 8 V ± 0.1 V

## Display

LCD panel (65 mm x 30 mm) with analog and digital display including unit of measure, type of current and various special functions

## Analog:

Display LCD scale with pointer  
 Scale length 55 mm for V  $\overline{=}$  and A  $\overline{=}$ , 47 mm in all other ranges  
 Scaling  $\mp$  5 ... 0 ...  $\pm$  30 with 35 scale divisions for  $\overline{=}$ , 0 ... 30 with 30 scale divisions in all other ranges

Polarity display With automatic switching  
 Overflow display Triangle (13)  
 Measuring rate 20 measurements per second, 10 measurements per second for  $\Omega$

## Digital:

Display / char. height 7-segment characters / 15 mm  
 Number of places 3 $\frac{3}{4}$ -place  $\overline{=}$ , 3100 steps  
 Overflow display „D.L.“ appears  
 Polarity display “-” sign is displayed if plus pole is connected to  $\perp$   
 Measuring rate 2 measurements per second, 1 measurement per second for  $\Omega$  and °C

## Power Supply

Battery 9 V flat-cell battery, zinc carbon per IEC6F22, alkaline manganese per IECLR6 or equivalent rechargeable NiCd battery

## Service life

With alkaline manganese:  
 approx. 750 hours for V  $\overline{=}$ , A  $\overline{=}$   
 approx. 200 hours for V  $\sim$ , A  $\sim$   
 Times 0.7 for interface operation

# Analog-Digital Multimeter

Battery test  $\text{⚡}$  is displayed automatically if battery voltage drops to below approximately 7 V.

## Electrical Safety

Safety class II per IEC 61010-1:2001/EN 61010-1:2001/  
VDE 0411-1:2002

Measuring category CAT III

Nominal voltage 600 V

Fouling factor 2

Test voltage 5.2 kV~ per IEC 61010-1/EN 61010-1

## Electromagnetic Compatibility (EMC)

Interference emission EN 61326: 2002 class B

Interference immunity EN 61326: 2002  
IEC 61000-4-2: 1995/A1: 1998  
Feature A: 8 kV atmospheric discharge  
4 kV contact discharge  
IEC 61000-4-3: 1995/A1: 1998  
Feature B: 3 V/m

## Fuses

Fuse links for all ranges up to 300 mA  
FF 1.6 A/700 V, 6.3 mm x 32 mm, switching capacity: 50 kA at 700 V~ with ohmic load, protects all current measuring ranges up to 300 mA in combination with power diodes

Fuse links for all ranges up to 10 A  
FF(UR) 16 A/600 V, 10 mm x 38 mm, switching capacity: 100 kA at 600 V with ohmic load, protects 3 A and 10 A ranges to 600 V

## Interface

Type RS 232C, serial

Data transmission Optical via infrared light through the housing

Baud rate 8192 bits per second

## Ambient Conditions

Accuracy range 0 °C ... + 40 °C

Operating temp. -10 °C ... + 50 °C

Storage temperature - 25 °C ... + 70 °C without batteries

Relative humidity 45 ... 75%, no condensation allowed

Elevation to 2000 m

## Mechanical Design

Protection IP 40, IP 20 at the connector jacks per DIN VDE 0470, part 1 / EN 60529

Dimensions 84 mm x 195 mm x 35 mm

Weight Approx. 350 gr. with battery

## Standard Equipment

- 1 analog-digital multimeter
- 1 protective rubber cover
- 1 9 V flat-cell battery
- 1 set of measurement cables
- 1 DKD calibration certificate
- 1 abbreviated operating instructions

Detailed operating instructions are available on our website [www.gossenmetrawatt.com](http://www.gossenmetrawatt.com).

## Order Information

Description	Type	Article Number
Analog-digital multimeter with IR interface, standard equipment see above	<b>METRAHit ONE PLUS</b>	M204D
<b>Accessories</b>		
Pt100 temperature sensor for surface and immersion measurements, -40 ... +600 °C	Z3409	GTZ 3409 000 R0001
Pt1000 temperature sensor, -20 ... +220 °C for measurement in household appliances, as well as in gases and liquids, 3.2 mm diameter stainless steel immersion tube	TF220	Z102A
Clip-on current transformer, 30 mA ... 150 A~, 1000:1, ±2.5 %, 1 mA/A	WZ12D	Z219D
Clip-on current sensor 60 / 600 A $\overline{\sim}$ , 40 / 400 A $\sim$ , 10 mV / A or 1 mV / A $\overline{\sim}$	Z13B	Z213B
Carrying pouch	F829	GTZ 3301 000 R0003
Imitation leather carrying pouch for one METRAHit® and accessories	F836	GTZ 3302 000 R0001
Imitation leather carrying pouch for two METRAHit®, adapter and accessories	F840	GTZ 3302 001 R0001
Hard case for 1 METRAHit® and accessories	HC20	Z113A
Hard case for two METRAHit®, adapter and accessories	HC30	Z113A
Single-channel memory pack consisting of SI232-II, cable, METRAWin®10/METRAHit® software and installation instructions	1-CH.Pack	GTZ 3231 020 R0001
Memory adapter	SI232-II	GTZ 3242 020 R0001
RS 232 interface cable, 2 m (included with Z3231)	Z3241	GTZ 3241 000 R0001
METRAWin®10/METRAHit® software update and installation instructions	Z3240	GTZ 3240 000 R0001
Fuses (pack of 10)	FF 1.6 A / 700 V	Z109E
Fuses (pack of 10)	FF(UR) 16 A / 600 V	Z109D

For additional information on accessories, please refer to

- our „Measuring Instruments and Testers“ catalogue
- our website [www.gossenmetrawatt.com](http://www.gossenmetrawatt.com)